



# SmartSource®

## Expert Elite

### Intelligent Network Scanner



## SmartSource Expert Elite

The SmartSource Expert Elite scanner adds a standard 100Base-T Ethernet connection and built-in intelligence to the popular SmartSource Elite series platform. The Expert Elite includes all of the features that make the Elite series an ideal check scanner for teller and remote deposit capture applications including a small footprint, durable design, high speed, and industry leading image capture of checks and ID cards.

In addition to an Ethernet connection, the Expert Elite scanner is capable of performing all required image and MICR

processing while maintaining rated throughput. Built-in processing incorporates double-document detection, MICR recognition, OCR recognition, combined MICR/OCR recognition, image clean-up, thresholding, cropping, and compression.




## The Intelligent Network Advantage

Network scanners with built-in intelligence have an incredible advantage over USB scanners and network scanners lacking embedded processing. Unlike USB scanners, the Expert Elite is not tethered to a single computer and can be shared by multiple users.

In addition, the Expert Elite is easily deployed in a virtual desktop environment. Built-in processing and image compression eliminates the issue of extreme amounts of data transferring over a USB connection.

Scanner installation is greatly simplified by eliminating the need to install a USB driver and API software. Simply connect the Expert Elite scanner to the client network and it is ready to go.

Easy network connectivity combined with Digital Check's industry-leading quality and performance make the SmartSource Expert Elite intelligent network scanner the perfect fit for deployment in teller and remote deposit capture environments.

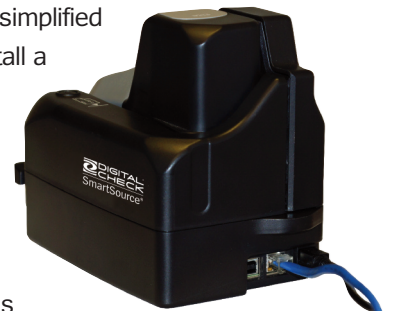

# SmartSource Expert Elite Technical Information

## Document Processing Throughput

Document throughput of 55 or 150 documents per minute

## Power Requirements

100-240 VAC @ 50/60 Hz  
Operating Power: 20 W  
Standby Power: 3 W

## Weight

Installed weight: 4.7 lbs (2.1 kg)  
Power supply: 0.55 lbs (0.25 kg)

## Certifications

CE, UL/CUL, FCC Class A, ICES, VCCI, BIS, RoHS

## Document Sizes

Document size  
- Height: 2.00 to 6.00 inches (5.08 to 15.24 cm)  
- Imaged height: 4.25 inches (10.80 cm)  
- Length: 2.90 to 9.25 inches (7.37 to 23.5 cm)

## Document weight

- Paper weight: 16 to 28 lb (60 to 105 gsm)  
- Accepts 12 lb (45 gsm) paper at a reduced throughput & pocket capacity  
- Alternate input accepts ID cards & other media up to 0.030 inches thick

## Communication Interface

10/100 Ethernet

## Operating Systems

Windows 7 Professional 32 and 64-bit  
Windows 8 Professional 32 and 64-bit  
Windows 10 Professional 32 and 64-bit

## Rear Endorsement

Ink jet print cartridge (600 dpi)  
One (1) to four (4) line endorsement  
Three (3) levels of print quality (economy, standard, or premium)

## Application Programming Interfaces (API)

SmartPVA API  
Ranger

## Single Output Pocket

150 item pocket capacity

## Automatic Document Feeder

Up to 100 item hopper capacity  
Automatically opens for ease of use  
Double document detection

## Dimensions

Length: 8.86 in (22.5 cm)  
Depth: 5.39 in (13.7 cm)  
Height: 6.99 in (17.8 cm)

## Magnetic Ink Character Recognition (MICR)

Magnetic E13B and CMC7 MICR read  
E13B Optical read for combined MICR/OCR results

## Image Capture

Front and rear image capture at 300 dots per inch (dpi)  
Up to five (5) images

## Image renditions available

- Bi-tonal (black/white)  
- Gray level (256 gray levels)

## Image resolutions available

- 240, 200 dpi gray level or bi-tonal  
- 120, 100 dpi gray level

## Image Compression Standards

CCITT Group 4 (bi-tonal images)  
JPEG Baseline (gray level images)

## Operator Interface

Combined power switch, feeder start/stop, and SmartClear button  
Light Emitting Diode (LED)

## Optical Character Recognition (OCR)

OCR-A, OCR-B, E13B, and 1D barcode fonts supported  
Two (2) 0.50 inch OCR scan bands provided  
96 characters per scan band  
MICR/OCR combine read

**NOTES:** Not every API Operating System combination may be qualified. Contact your application provider for more information.

Specific capabilities may not be supported by every API or will require a minimum API version. Contact Digital Check for more information.

For more information about the entire line of Digital Check remote capture products, call 1-847-446-2285) or visit [www.digitalcheck.com](http://www.digitalcheck.com)

SmartSource and ReceiptNOW are registered trademarks of Digital Check Corp. Ranger is a registered trademark of Silver Bullet Technology, Inc. All other brands and products referenced in this document are acknowledged to be the trademarks or registered trademarks of their respective holders. Specifications are subject to change without notice.

3/17 All rights reserved. © 2017 Digital Check Corp.

 **REYNOLDS**  
BUSINESS SYSTEMS  
610-398-9080 | Toll-Free 1-877-515-8500  
[info@reynoldsbusiness.com](mailto:info@reynoldsbusiness.com)  
[www.reynoldsbusiness.com](http://www.reynoldsbusiness.com)



**SmartTIP** Use your smartphone for more information.

PS16-0246-000